



DGA STANDARD TEE SIGNS

- HOT-DIPPED GALVANIZED STEEL PIPE AND FRAME.
- WHITE LEXAN TEE SIGN PLATE WITH DECAL KIT FOR HOLE LAYOUTS.
- 3M™ SCOTCHCAL™ SEVERE WEATHER AND HANDLING ADHESIVE TEE LAYOUT COVER FILM.



HOLE LAYOUT DECAL KIT

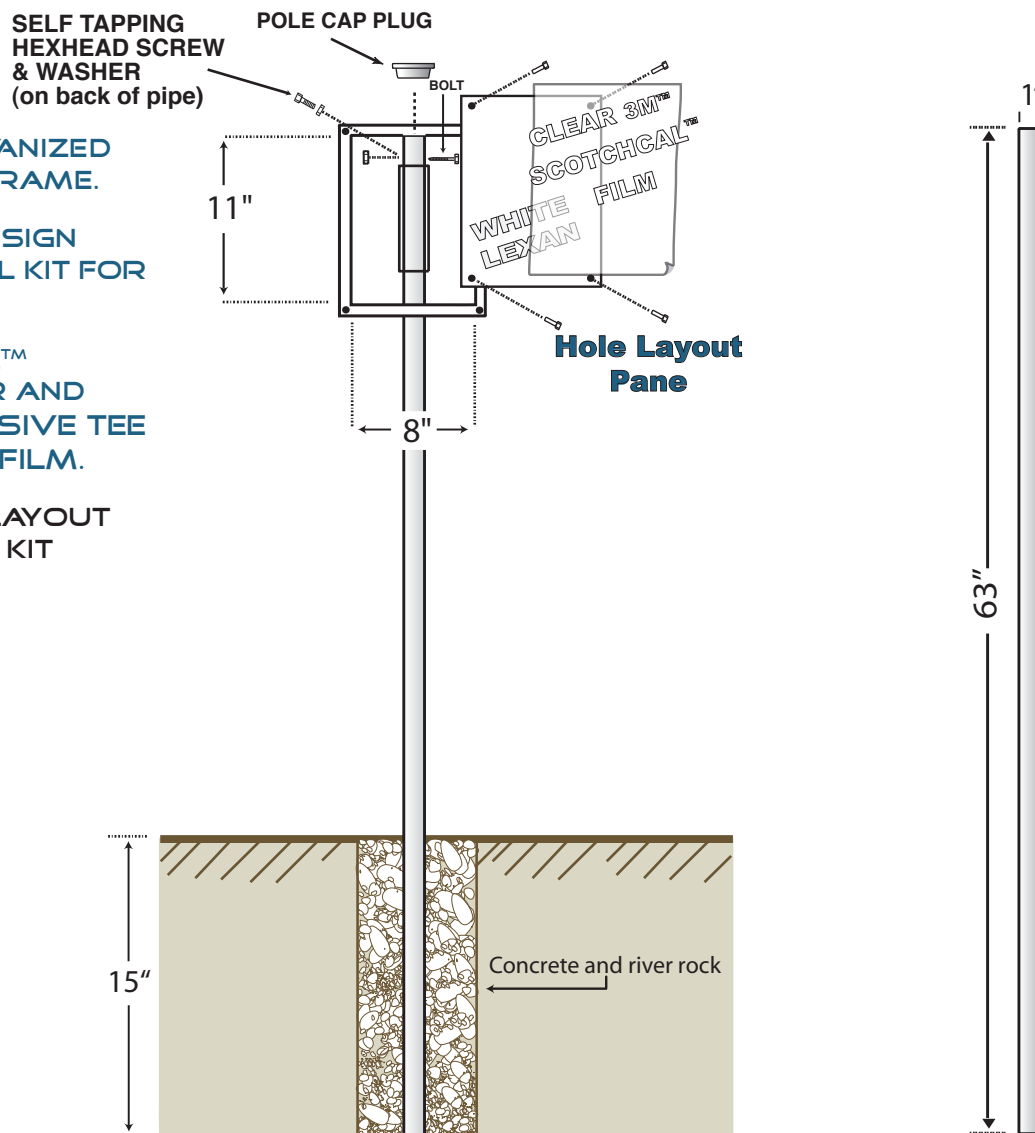

Sign – 8" x 11" Hole Layout Pane: White Lexan plastic panel, pop riveted into place. Includes silk screened template sheet with par, feet and hole layout and a clear 3M™ Scotchcal™ severe weather and handling adhesive cover film.

Sign Frame – Welded and hot dipped galvanized.

Collar – 10.25" x 1⁵/₁₆" I.D., sleeve. Welded and hot dipped galvanized pipe, drilled.

Frames – 8" x 11" Angle iron 1"x1"x¹/₈" hot rolled steel and hot dipped galvanized. Bolt, hex head nut and nylon locknut, tec screw and star lock washer mounting hardware.

Pop Rivets – Pre-installed on Hole Layout Pane (locking bolts used on Sponsor Pane for accessibility).

Pole – 69" x 1" I.D., hot dipped galvanized, drilled.

Concrete – Approximately 1 cubic foot.

River Rock – Used to stabilize anchor until cement sets. (Concrete, river rock and lock not furnished).